

FLOOR BUNDING



TRI-BUND FLEXIBLE BUNDING

TRI-BUND is today's flexible and cost effective solution to bunding in traffic areas.

Typical rigid bunding designs present a difficulty to traffic, particularly forklifts, and can increase risk of spills due to the inherent 'bump' factor.

TRI-BUND offers the following features:

- Caters to all types of traffic
- Returns to original shape almost immediately after driven over
- Simple and quick to install
- High visible yellow
- Prevents spills from progressing into or out of protected areas
- Durable, made from heavy duty PVC
- Easy to clean
- Available in one popular size of 50mm high



Prt No.	Desc	Length
TB5020	Tribund flexible bund x 50mm	2m
TB5090	90° Joiner to suit 50mm tribund	-
TB50J	Straight Joiner to suit 50mm tribund	-
TBUA	Polyurethane floor adhesive 370gsm	-
TBAD	PVC adhesive 500mL	-


F4 RIGID FLOOR BUNDING SYSTEM BY AQUASOL OFFERS OUTSTANDING VALUE AND FLEXIBILITY.

Some of the features which make this product a success

- Coated galvanised steel with concrete core gives this product outstanding strength.
- Minimal joints, available in lengths up to 7.5m
- Hi-vis coating in safety yellow.
- Available in standard size of 50mm high.
- Reduced site time, simply seal to the floor with polyurethane sealant and masonry anchors.
- Custom sizes available on request.

Ideal for the following areas

- Chemical storage areas
- Bulk liquid warehousing
- Bunding around diesel oil tanks
- Washdown bays

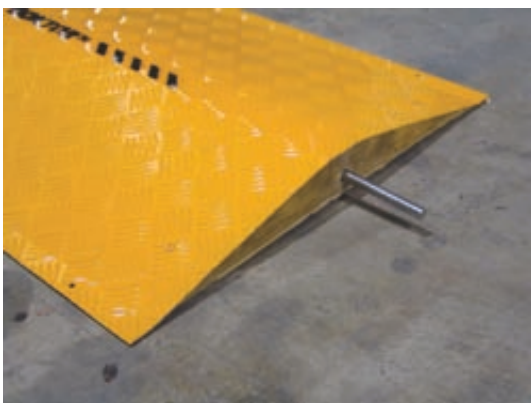

Prt No.	Desc	Dimensions W x H x L
F450D	Drive over type rigid floor bund	600mm x 50mm x 1200mm
F450S	Standard type rigid floor bund	120mm x 50mm x 3000mm